


Hydraulic Microdrilling Rig


SM-14

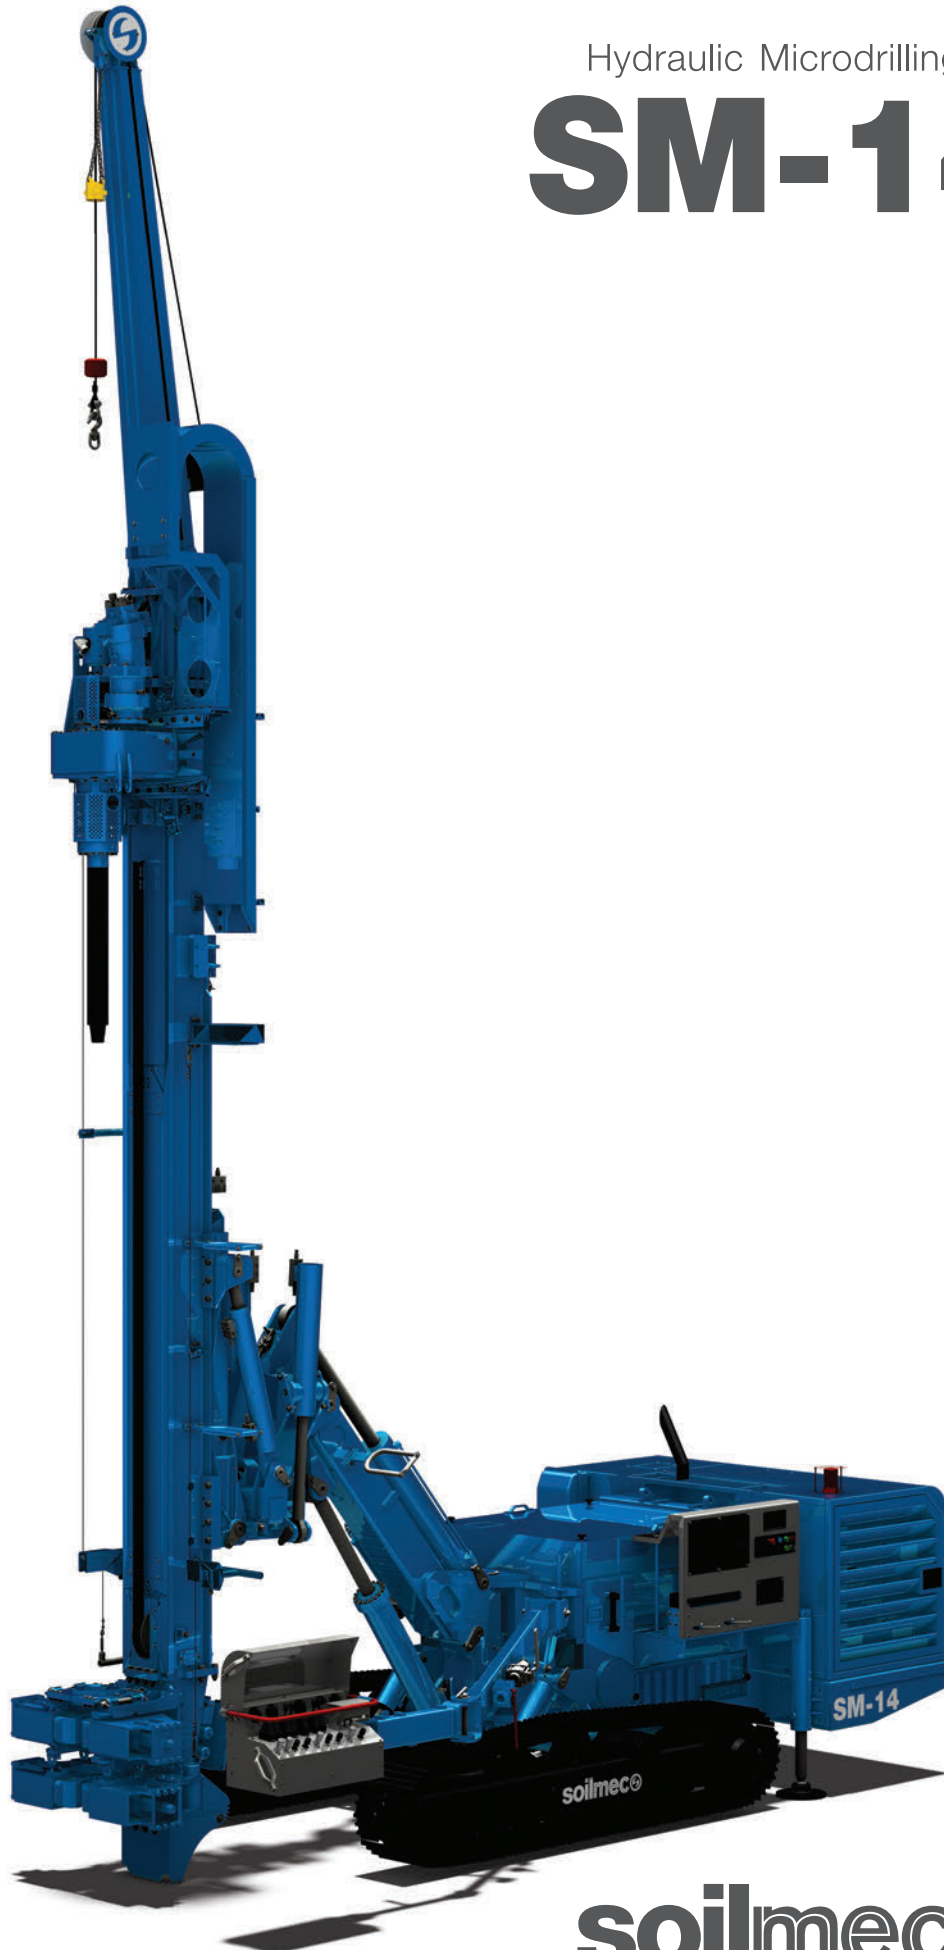

soilmec 
Drilling and Foundation Equipment

SM-14 Hydraulic Microdrilling Rig

APPLICATIONS

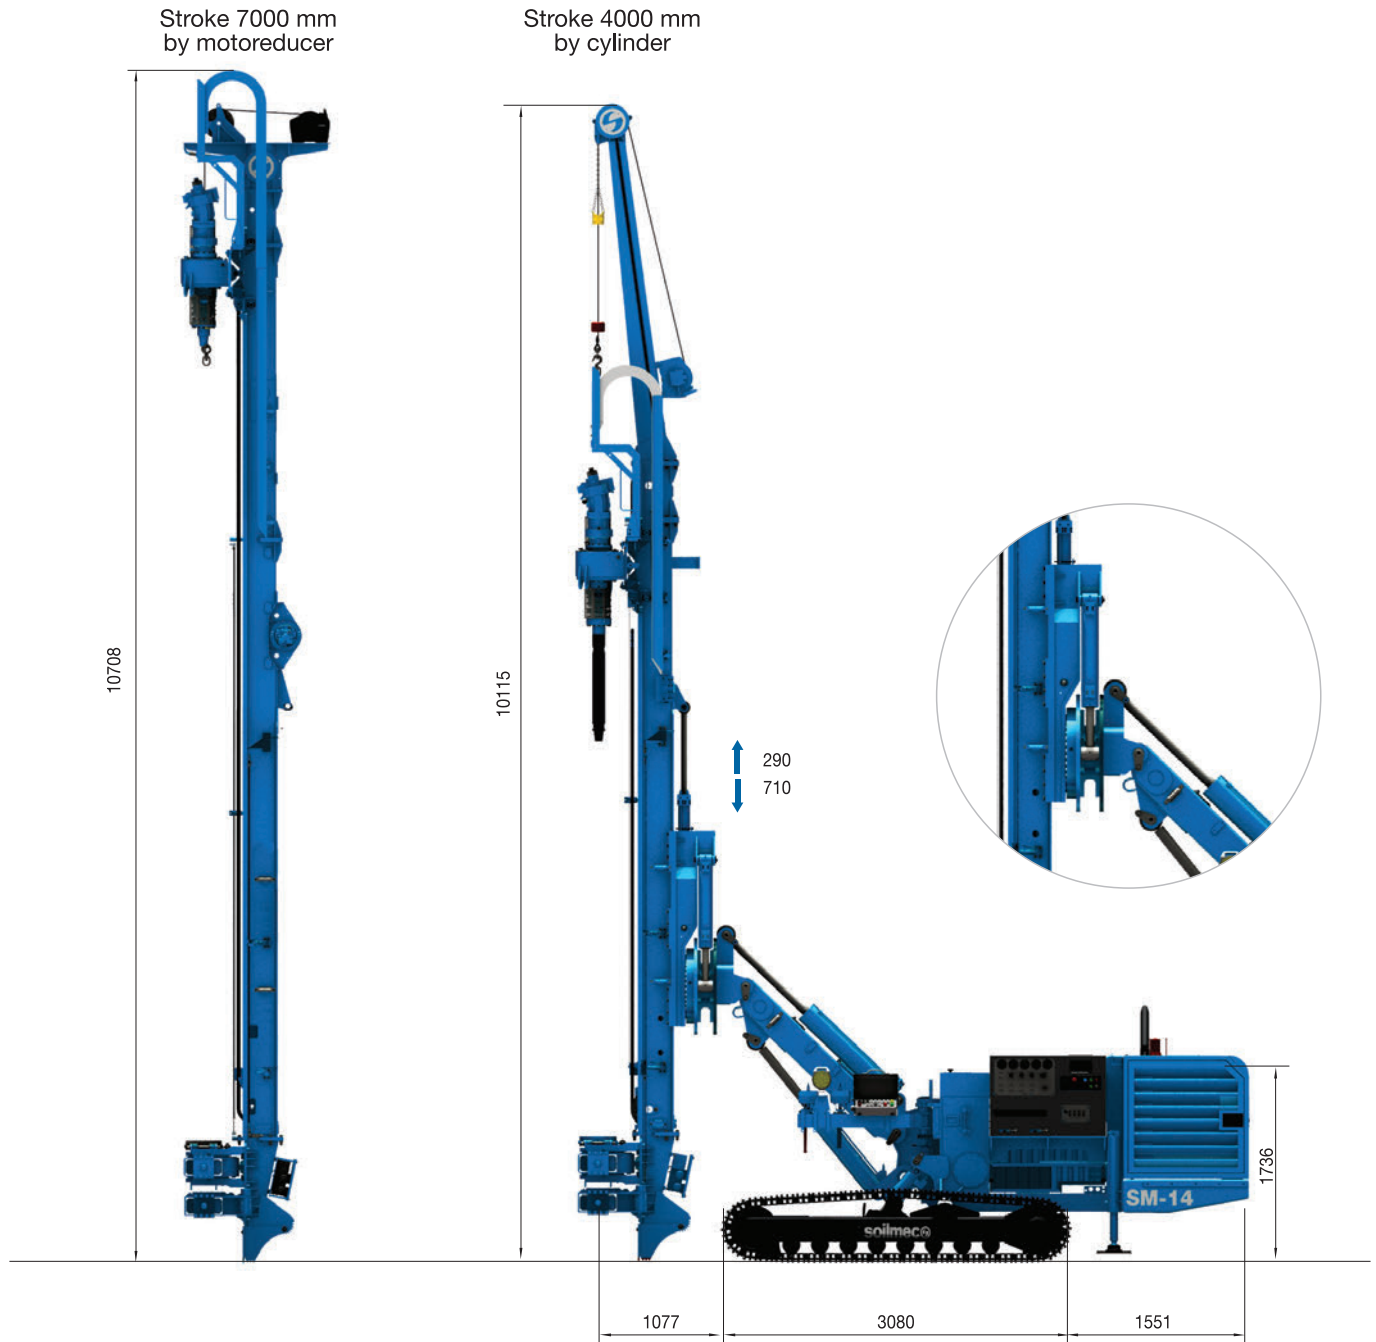

Hoist & Feed system	Cylinder	Cylinder	Motoreducer	Motoreducer
Feed stroke	4000 mm	157.5 in	4350 - 7000 mm	171.3 - 275.6 in
Rod length type (c/w one rotary head)	3 m	9.8 ft	3 / 6 m	9.8 / 19.7 ft
Maximum hoist pull/feed force	89 / 45 kN	20008 / 10116 lbf	72 / 72 kN	16186 / 16186 lbf
Maximum speed (fast/low operation)	28 / 6 m/min	92 / 20 ft/min	29 / 5 m/min	95 / 16 ft/min

Rotary head range	HD 1200V	HD 1200V	HT 1400V	HT 1400V	HTD 2500G	HTD 2500G
Gear box type	Variable	Variable	Variable	Variable	3 ratios	3 ratios
Maximum torque	1210 daNm	8924 lbf*ft	1360 daNm	10031 lbf*ft	2550 daNm	18807 lbf*ft
Maximum rotation	277 rpm	277 rpm	229 rpm	229 rpm	52 rpm	52 rpm
Hollow shaft	114 mm	4.5 in	114 mm	4.5 in	-	-
Inner passage	124 mm	4.9 in	124 mm	4.9 in	101,5 mm	4 in
Maximum tools power	70 kW	94 HP	65 kW	87 HP	70 kW	94 HP

SM-14 Hydraulic Microdrilling Rig

TECHNICAL DATA SHEET

Undercarriage		
- Track shoe width	400 mm	15.7 in
- Wheel base (centre idler to centre sprocket)	2481 mm	97.7 in
- Overall length	3080 mm	121.2 in
- Overall width (not extendable crawler)	2300 mm	90.6 in
- Travelling speed	2,70 km/h	1.68 mph
- Max climbing capacity (gradeability)	60 % (30°)	60 % (30°)
- Traction force	123 kN	27651 lbf
- Average ground pressure	0,070 MPa	10.2 psi
- Ground stabilizers	n° 2 fixed on rear	n° 2 fixed on rear
Diesel Engine		
	CUMMINS QSB 4.5	CUMMINS QSB 4.5
- Emission certification	Stage IIIA - Tier 3 and Stage IIIB - Tier 4i	Stage IIIA - Tier 3 and Stage IIIB - Tier 4i
- Aspiration	turbocharged and charge air cooled	turbocharged and charge air cooled
- Power rating	119 kW @ 2200 rpm	159 HP @ 2200 rpm
- Fuel tank capacity	200 l	53 US gal
- Sound power level and sound pressure level	LwA 106 - LpA 79 dB(A)	LwA 106 - LpA 79 dB(A)
Electric motor (optional)		
	SIEMENS 4 poles 50Hz 380 / 660 V	SIEMENS 4 poles 50Hz 380 / 660 V
- Power rating	90 kW @ 1485 rpm	121 HP @ 1485 rpm
Hydraulic system		
- Main pumps: variable axial pumps	156 + 156 l/min	41.2 + 41.2 US gal/min
- Set pressure main pumps	28 MPa	4061 psi
- Auxiliary pumps: gear pumps	20 l/min	5.3 US gal/min
- Hydraulic oil tank capacity	400 l	106 US gal
Clamp & hydraulic joint breaker		
- Nominal size	up to 50 - 415 mm	up to 2.0 - 16.3 in
- Maximum clamping force	266 kN	59798 lbf
- Maximum breaking torque	5060 daNm	37321 lbf*ft
- Pull-up extractor clamp force/stroke	100 kN / 400 mm	22481 lbf / 3.9 in
Service winch		
	M5 - L2 - T5	M5 - L2 - T5
- Type	controlled descent	controlled descent
- 1st layer line pull	24 kN	5395 lbf
- 1st layer nominal rope speed	46 m/min	151 ft/min
- Rope diameter	10 mm	0.39 in
- Rope capacity / Rope fitted	46 / 40 m	150.9 / 131.2 ft
Rod carousel		
- N. of rods	3 - 10 - 6	3 - 10 - 6
- Rod diameter	76 - 114 mm	3.0 - 4.5 in
- Rod length	3 m	9.8 ft
- Maximum loaded rods weight	200 / 600 kg	441 / 1323 lb

STANDARD EQUIPMENT






- Crawler undercarriage with $\pm 10^\circ$ tilting gauge
- Diesel Engine Cummins
- Rotary head HD1200V type complete with floating system
- Drill mast with cylinder crowd system for 4000 mm stroke
- Clamp and breaker 50-315 mm
- Drilling controls by means of assembled panel
- Counter side c/w 2 cylinders for 4x90° sectors
- Hydraulic control board for drilling
- Radio remote control for tracking and positioning
- Service winch with jib extension

OPTIONAL EQUIPMENT

- Electr. engine (90 kW / 121 BHP @ 1485 rpm)
- Modular mast for 4 m or 7 m stroke complete with motoredreducer crowd system
- Wide range of rotary head up to 2500 daNm
- Rod carousel up to 10 rods
- Hydraulic lifting crane: 400 kg @ 6m
- Full radio remote control
- Foam pump
- Mud / water pump
- Clamp and breaker up to 60-415mm
- Slew ring on the mast
- Double rotary
- Jet grouting kit for T1/T1S and T2 type
- CFA kit for special technologies
- Top hammer
- Articulated new joint 90° (without pins removal)


SM-14 Hydraulic Microdrilling Rig

MOVIMENTATIONS

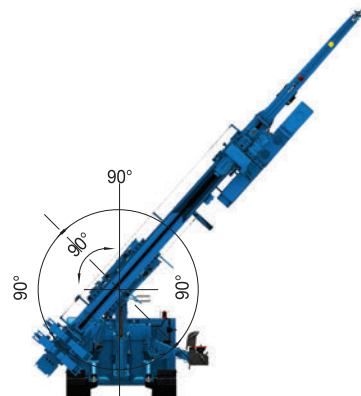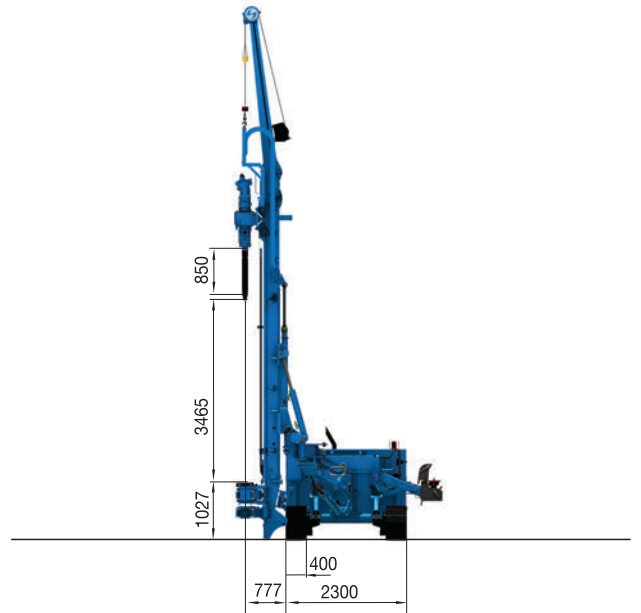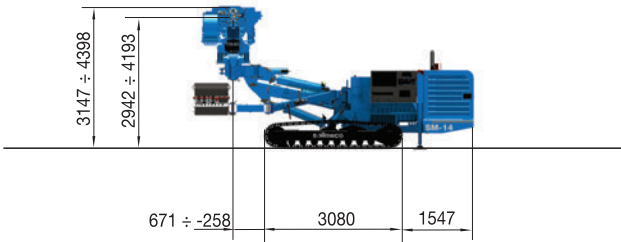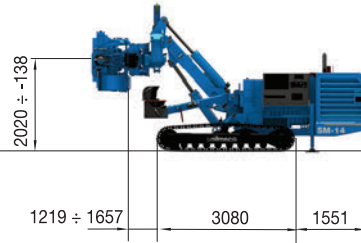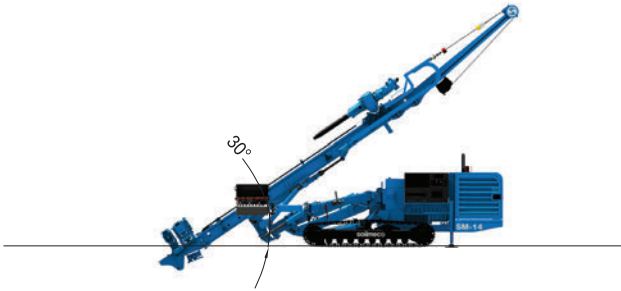

SM-14 Hydraulic Microdrilling Rig

JET GROUTING


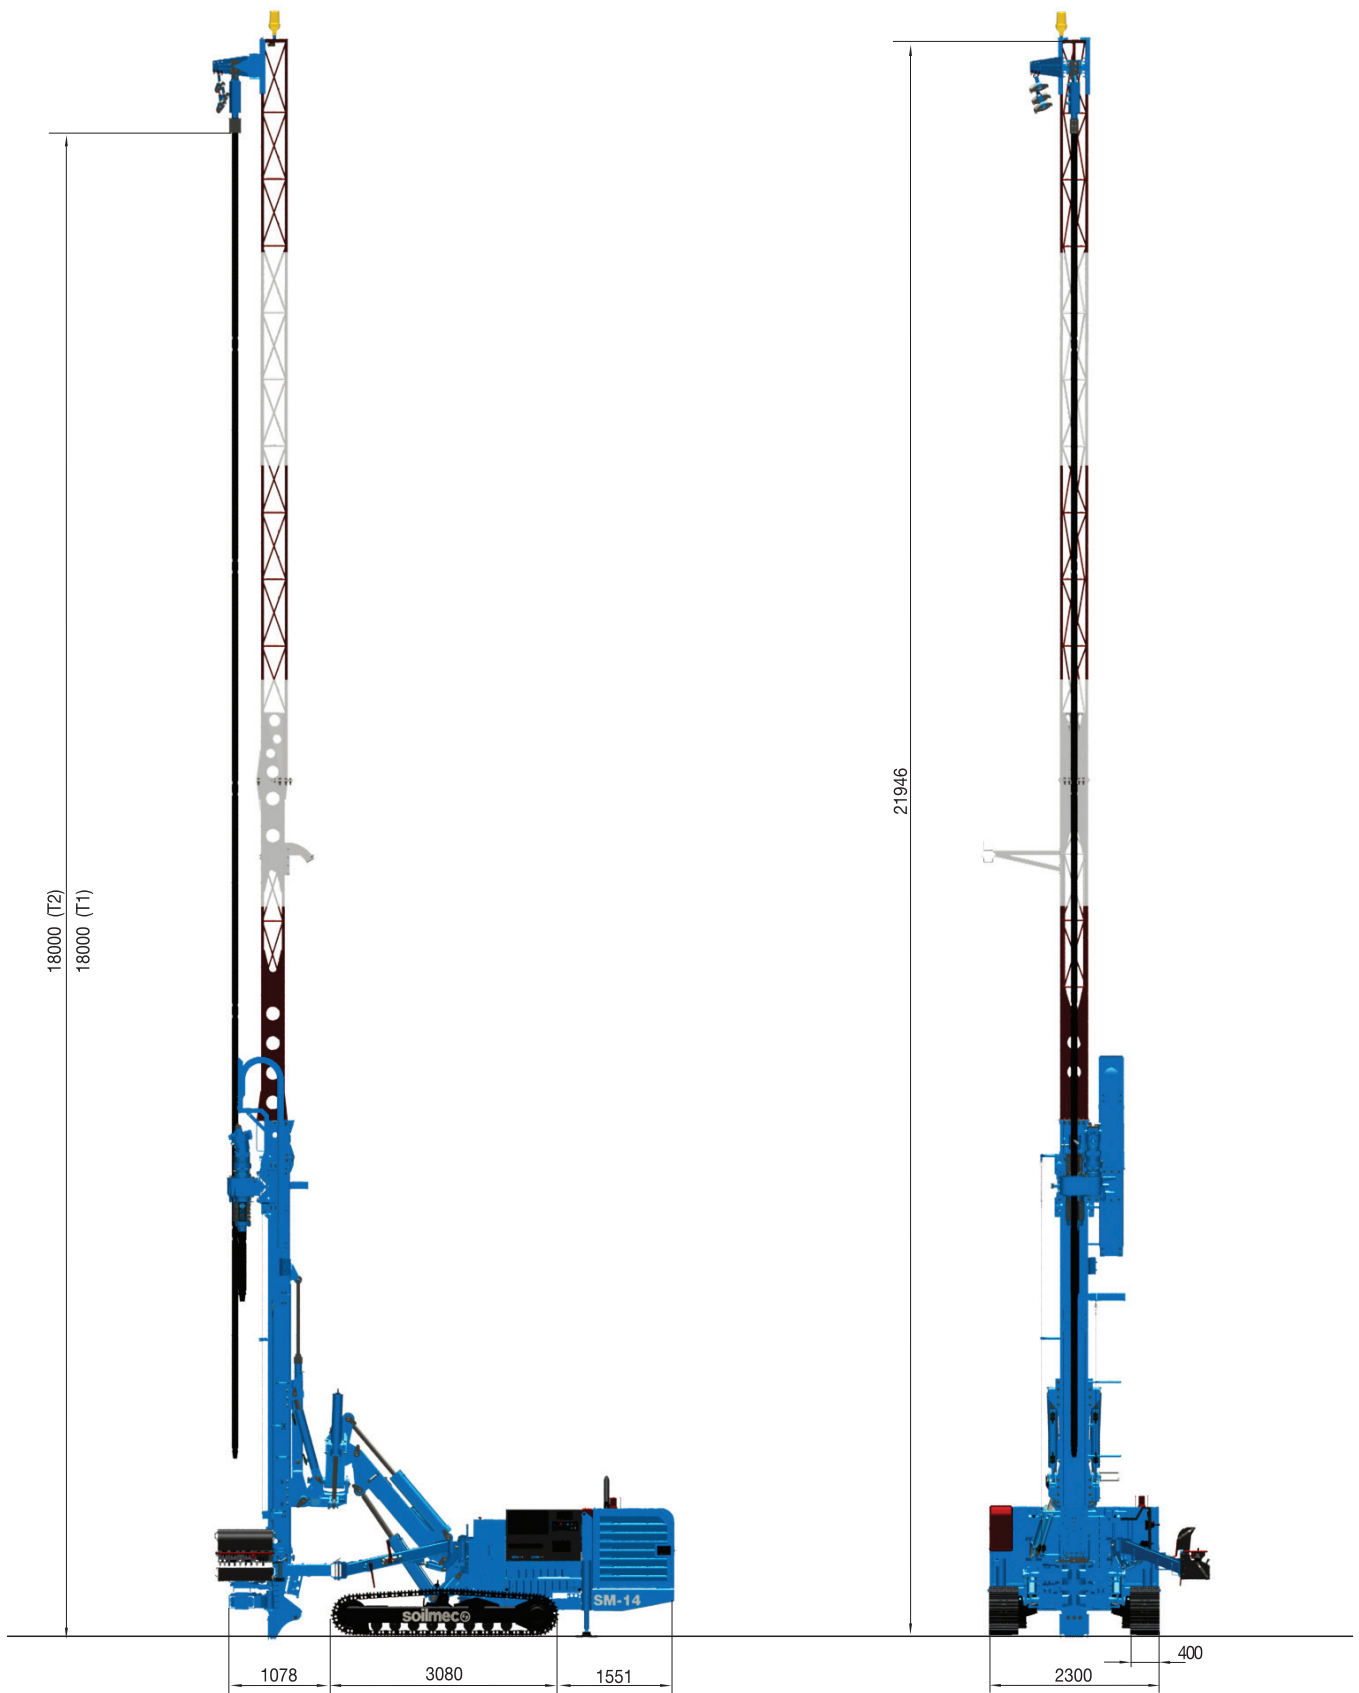


JET GROUTING VERSION

Operating weight in jetting version	15000 / 15100 kg	33069 / 33290 lb
Rod diameter	90 - 114 mm	3.5 - 4.5 in
Max treatment depth in a single passage	18 m	59 ft
Drillguide extensions	4,6 + 10 m	13.1 + 32.8 ft

SM-14 Hydraulic Microdrilling Rig

TRANSPORT, DIMENSIONS AND WEIGHTS

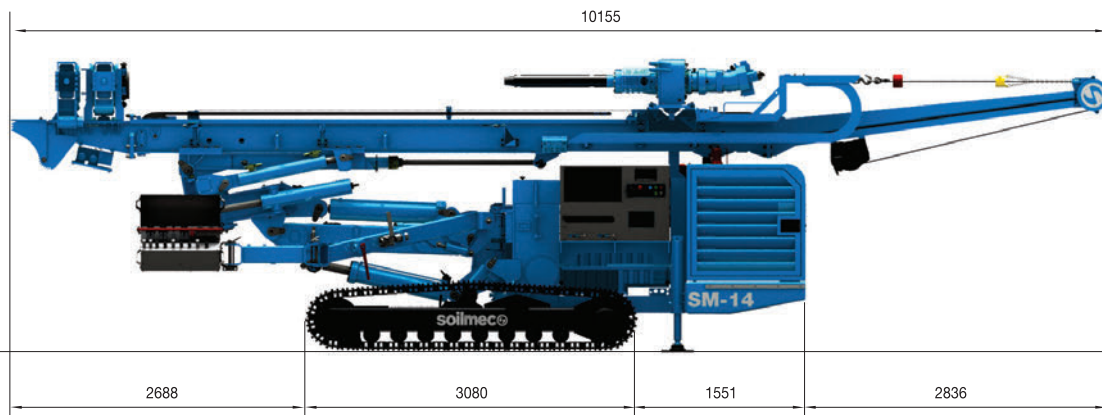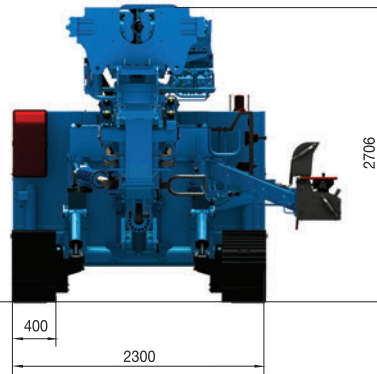

Transport		
Transport width	2300 mm	91 in
Transport height	2750 mm	108.3 in
Transport length <i>stroke 4000/ stroke 7000</i>	10155/10424 mm	400/410.4 in
Transport weight <i>stroke 4000/ stroke 7000</i>	14300/14600 kg	31526/32187 lb

* Containerizable

This brochure has been edited and distributed by SOILMEC Spa. The present document cancels and override any previous ones. This brochure shall not be distributed, reproduced or exhibited without SOILMEC Spa. authorization in accordance with to SOILMEC web site disclaimer condition.

SOILMEC Spa distributes machinery and structures all over the world, supported by SOILMEC Spa subsidiary companies and dealers. The complete Soilmec network list is available on the web site www.soilmec.it